



RHEEM ELECTRIC STORAGE WATER HEATERS



ELECTRIC

80L -
400L

DELIVERY

12
YEAR

CYLINDER
WARRANTY¹

Indoor/
Outdoor[†]

INSTALLATION



DUAL
HANDED[‡]



FEATURES

- Fast, easy like-for-like replacement
- Feature dual handed inlet and outlet fittings
- 80L and 125L models provide T&PR fittings on both sides of the tank for even easier installation
- Exclusive Rheem Ultramel[®] Class Y enamel
- Small diameter 480mm (80L & 125L)
- Thicker anode (27mm) for added protection
- Twin Element models provide that little bit extra when you need it (160L - 400L)
- Models with a capacity of 125L or more suit connection to concessional (off peak) tariffs
- 12 year cylinder warranty¹, including 1 year labour on cylinder for 80L to 400L models

WHY CHOOSE RHEEM



- Backed by over 70 years of Rheem water heating experience
- Capacities to suit every family size and hot water requirement
- Mains pressure water delivery for water that comes on steady, hot and strong!
- Full technical support through Rheem's National Service Network





RHEEM ELECTRIC STORAGE WATER HEATERS

MODEL		80L	125L	160L	250L	315L	400L
Rheem Single Element		491080	491125	491160	491250	491315	491400
Rheem Twin Element				492160 ²	492250 ³	492315 ³	492400 ³
Hot Water Delivery	Litres	80	125	160	250	315	400
Boost Capacity (twin element models)	Litres	-	-	45	50	50	90
kW Rating	1.8	✓	✓	✓	✓	-	-
	2.4	-	-	✓	-	-	-
	3.6	✓	✓	✓	✓	✓	✓
	4.8	-	-	-	✓	✓	✓
Relief Valve Setting	kPa	1400	1400	1400	1000	1000	1000
Expansion Control Valve (kPa)	kPa	1200	1200	1200	850	850	850
Max Water Supply Pressure:							
with ECV (kPa)	kPa	960	960	960	680	680	680
without ECV (kPa)	kPa	1120	1120	1120	800	800	800
Water Connections		Rp ³ / ₄	Rp ³ / ₄	Rp ³ / ₄	Rp ³ / ₄	Rp ³ / ₄	Rp ³ / ₄
Dimensions							
A	mm	945	1340	1610	1395	1640	1840
B	mm	480	480	480	640	640	690
C	mm	515	515	515	680	680	730
D	mm	702	1102	1332	1117	1317	1479
E	mm	64	64	104	73	113	121
F	mm	66	66	66	103	103	105
G - Twin element models	mm	-	-	1081	988	1228	1323
H	degrees	24	24	23	32	32	30
J	degrees	60	60	58	88	88	83
M	degrees	-	-	58	92	92	97
Approx. Weight (packaged)	kg	35	48	56	76	91	113
Accessories							
Wall Mounting Bracket							
Part No: 299120 (80L model only)							

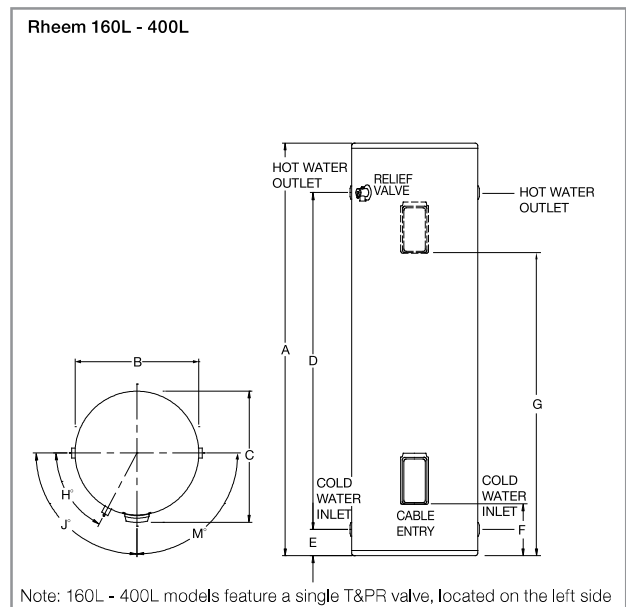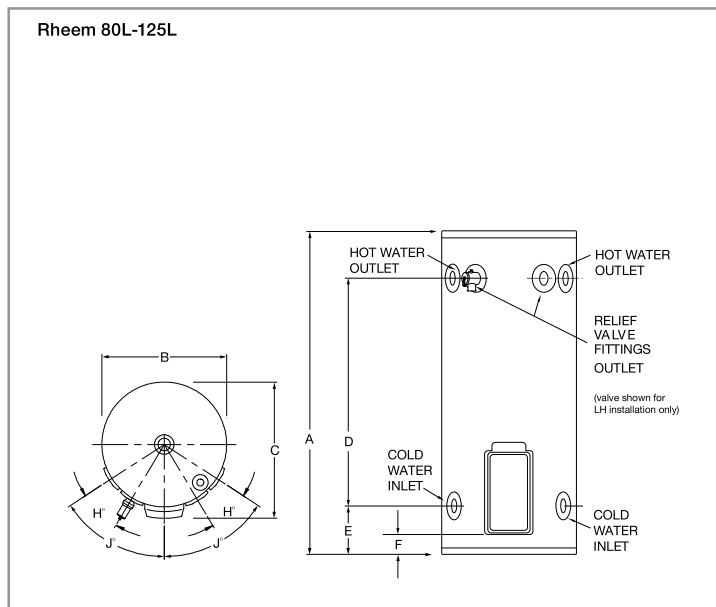

¹ Warranty: 12 Years on Cylinder, 1 Year Labour on Cylinder, 1 Year Parts & Labour warranty on all other components for Domestic (non-Commercial) installations. Conditions apply. See the Rheem warranty set out in the Owner's Guide & Installation Instructions or view at www.rheem.com.au/warranty

² Available in 3,6/3,0 element rating only

³ Available in 3,6 & 4,8 element rating only.

Materials and data are subject to change without notice.

[®] Registered Trademark of Rheem Australia Pty Ltd.

[™] Trademark of SAI Global.

Rheem Australia Pty Ltd.
 1 Alan Street, Rydalmere, New South Wales 2116, Australia
 PO Box 7508 Silverwater NSW 2128, Australia.
www.rheem.com.au



Rheem MKT Electric 80-400L Spec Sheet 07/2018