


POP-UP PLUG + WASTE **SVA-050** SERIES



Pop-up plug and waste for ceramic basins | 4 options

ORDER CODE	BUTTON CAP, CHROME FINISH SVA-050 With PVC base, for general use SVA-050-B With chrome base, recommended for use with bottle trap
	DOME CAP, CHROME FINISH SVA-051 With PVC base, for general use SVA-051-B With chrome base, recommended for use with bottle trap
	DOME CAP, WHITE GLOSS CERAMIC FINISH SVA-052 With PVC base, for general use SVA-052-B With chrome base, recommended for use with bottle trap
	DOME CAP, BLACK MATTE FINISH SVA-053 With PVC base, for general use SVA-053-B With chrome base, recommended for use with bottle trap
WASTE OUTLET	Suits 32 and 40 mm waste holes, suits overflow and non-overflow
FIXING	Must be fitted by a licensed plumber. Warranty does not cover any fault caused by installation or part installation by an unlicensed person. Refer to the diagram below for installation guidelines.
MATERIALS	As specified above for each style. PVC base where specified. Chrome base is chrome plated solid brass.
CLEANING	Clean with soapy water. Do not use corrosive or abrasive cleaners.

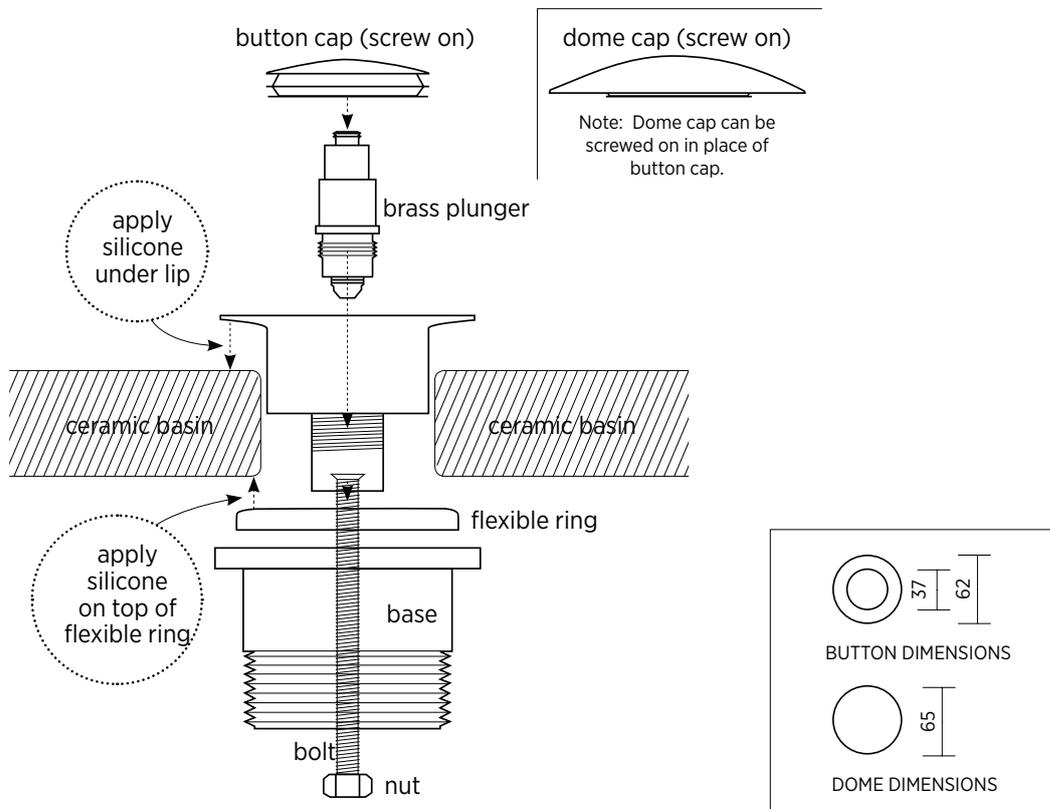

SEIMA

bathroom | kitchen | laundry

Please note

- All measurements are in millimetres.
- Specifications may vary without notice as part of our continuous improvement practices.
- Clean with a damp cloth. Do not use abrasive cleaners, liquids or pastes.

BOTTLE TRAP ROUND SVA-100 and SVA-101



Bottle trap, round design

- Designed for use with wall basins and installations with exposed plumbing
- Suits 32 and 40 mm waste holes

ORDER CODE CHROME FINISH

SVA-100-00 WALL EXIT: Chrome bottle trap with wall exit
 SVA-100-01 FLOOR EXIT: Chrome bottle trap with floor exit

BLACK - SILK MATTE FINISH

SVA-101-00 WALL EXIT: Black bottle trap with wall exit
 SVA-101-01 FLOOR EXIT: Black bottle trap with floor exit

WASTE Suits 32 or 40 mm wastes. Use 32/40mm adaptor supplied for connection to a 32 or 40 mm plug and waste.

FIXING Must be fitted by a licensed plumber. Warranty does not cover any fault caused by installation or part installation by an unlicensed person. Ensure all o-rings are lubricated with silicone based lubricant.

Fit connection pipe to plug and washer. Adjust trap height (trim connection pipe as required) to line up with wall outlet pipe and ensure there is a minimum 1.5 degree fall in the outlet pipe when installed.

Measure and trim outlet pipe, ensuring there is adequate allowance for pipe and rubber seal to fit into DWV female socket.

Fit rubber seal over outlet pipe and fit into 40mm DWV female socket.

Fit protective cover over outlet pipe prior to final connection to plumbing.


Firmly tighten all joints. Do not over-tighten. Test for leaks.

CLEANING Clean with soapy water. Do not use corrosive or abrasive cleaners.


MATERIAL Brass alloy

APPROVALS Watermark AS1589, Certificate number 23010

WALL EXIT CONFIGURATION

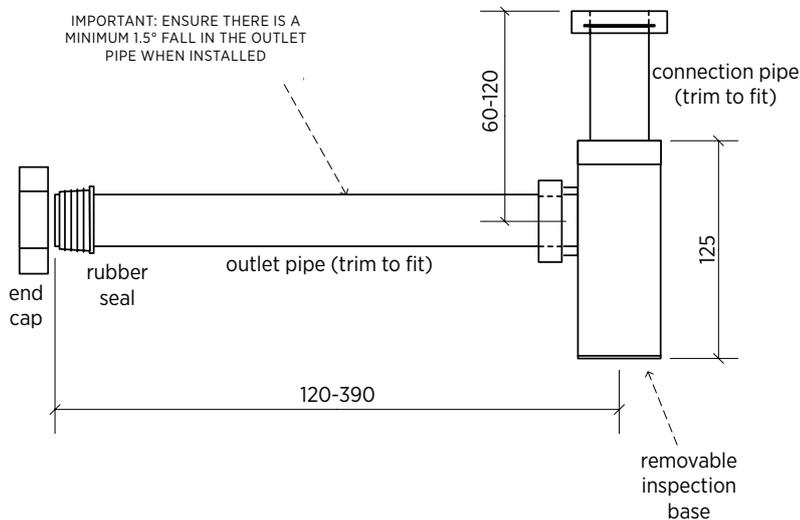

FLOOR EXIT CONFIGURATION

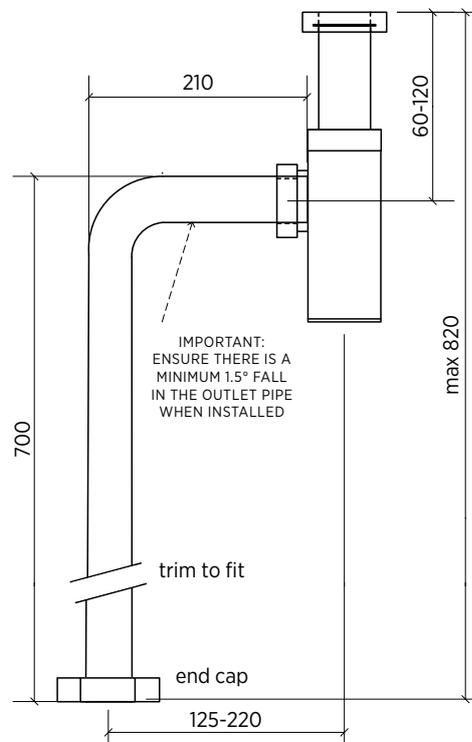

SEIMA

bathroom | kitchen | laundry

Please note

- All measurements are in millimetres.
- Specifications may vary without notice as part of our continuous improvement practices.
- Clean with a damp cloth. Do not use abrasive cleaners, liquids or pastes.

BOTTLE TRAP SQUARE SVA-200




Bottle trap, square design


- Designed for use with wall basins and installations with exposed plumbing
- Suits 32 and 40 mm waste holes

ORDER CODE	SVA-200-00	WALL EXIT: Chrome bottle trap with wall exit
	SVA-200-01	FLOOR EXIT: Chrome bottle trap with floor exit
WASTE	Suits 32 or 40 mm wastes. Use 32/40mm adaptor supplied for connection to a 32 or 40 mm plug and waste.	
FIXING	Must be fitted by a licensed plumber. Warranty does not cover any fault caused by installation or part installation by an unlicensed person. Ensure all o-rings are lubricated with silicone based lubricant. Fit connection pipe to plug and washer. Adjust trap height (trim connection pipe as required) to line up with wall outlet pipe and ensure there is a minimum 1.5 degree fall in the outlet pipe when installed. Measure and trim outlet pipe, ensuring there is adequate allowance for pipe and rubber seal to fit into DWV female socket. Fit rubber seal over outlet pipe and fit into 40mm DWV female socket. Fit protective cover over outlet pipe prior to final connection to plumbing. Firmly tighten all joints. Do not over-tighten. Test for leaks.	
CLEANING	Clean with soapy water. Do not use corrosive or abrasive cleaners.	
MATERIAL	Brass alloy, chrome finish	
APPROVALS	Watermark AS1589, Certificate number 23010	

WALL EXIT CONFIGURATION

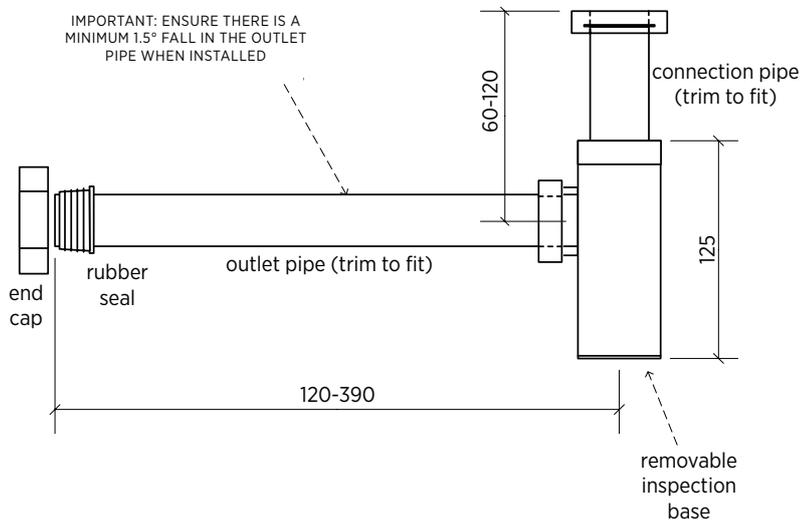

FLOOR EXIT CONFIGURATION

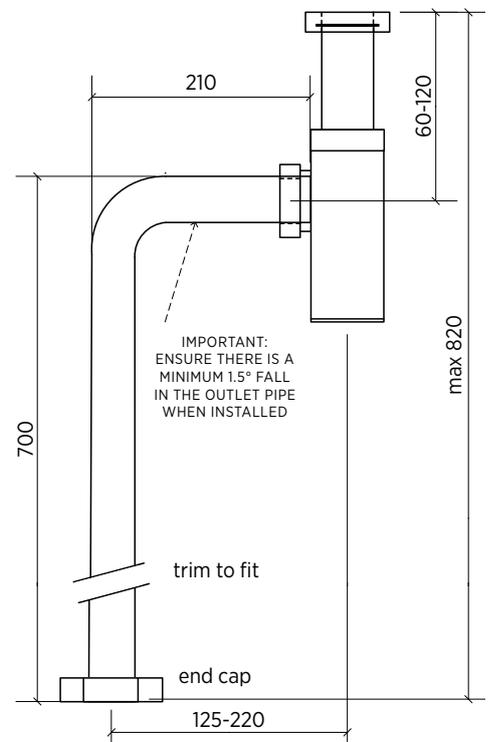

SEIMA

bathroom | kitchen | laundry

Please note

- All measurements are in millimetres.
- Specifications may vary without notice as part of our continuous improvement practices.
- Clean with a damp cloth. Do not use abrasive cleaners, liquids or pastes.