
LIMNI WALL FACED 🛇 📀 🕭

CERAMIC TOILET SUITE

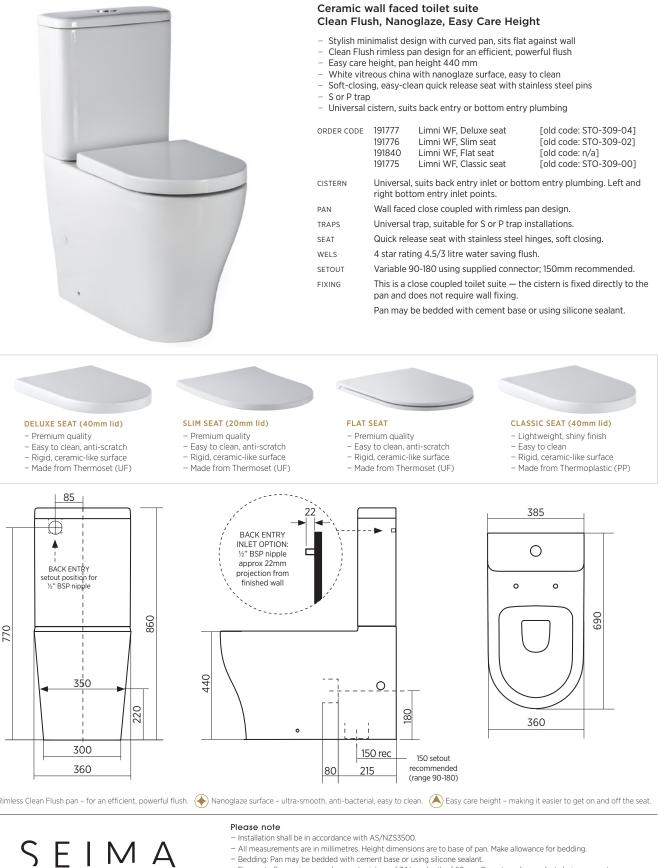

Fix pan to floor using a sand cement mixture of 3:1 to a depth of 60mm. Do not use lime or fast-drying cement. - Bracket fixing: The pan should be bedded with silicone sealant and fixed with the brackets supplied.

- Do NOT use epoxy type adhesives. - Dimensions are nominal and subject to normal ceramic manufacturing variations.
- Specifications may vary without notice as part of our continuous improvement practices.
- Clean with a damp cloth. Do not use abrasive cleaners, liquids or pastes.

seima.com.au

bathroom | kitchen | laundry

		CISTERN PAN TRAPS SEAT WELS SETOUT FIXING	 Universal, suits back entry inlet or bottom entry plumbing. Left and right bottom entry inlet points. Wall faced close coupled with rimless pan design. Universal trap, suitable for S or P trap installations. Quick release seat with stainless steel hinges, soft closing. 4 star rating 4.5/3 litre water saving flush. Variable 90-180 using supplied connector; 150mm recommended. This is a close coupled toilet suite — the cistern is fixed directly to the pan and does not require wall fixing. Pan may be bedded with cement base or using silicone sealant. 	
DELUXE SEAT (40mm lid) - Premium quality - Easy to clean, anti-scratch - Rigid, ceramic-like surface - Made from Thermoset (UF)	SLIM SEAT (20mm lid) - Premium quality - Easy to clean, anti-scratch - Rigid, ceramic-like surface - Made from Thermoset (UF)	– Pr – Ea – Ri	emium quality – Lightweig sy to clean, anti-scratch – Easy to cl gid, ceramic-like surface – Rigid, cera	AT (40mm lid) ht, shiny finish ean amic-like surface n Thermoplastic (PP)
85 BACK ENTRY setout position for ½" BSP nipple 1 0 1 0 1 0 1 0 1 0 1 0 1 0 350 0 300 360	Please note – Installation shall be	mooth, anti-bacte	50 rec 150 setout recommended (range 90-180) rial, easy to clean. Easy care height - making it eas	