

Collection: Elevate





Freestanding bath with integrated overflow • 1700mm

Arko 140 has a fine rim, high back and smooth contours.

- Seamless design
- White sanitary grade acrylic, available in Gloss and Matte finishes
- Excellent heat retention properties
- Adjustable support feet
- Fits 40mm waste
- Built-in overflow slit overflow included as standard

Order codes

WHITE GLOSS FINISH

Arko 140, White Gloss 192365

WHITE MATTE FINISH

Arko 140, White Matte 192366

Order Bath Wastes and FlexiWaste Bath Kits and Overflow Kits separately.

Product details

OVERFLOW Integrated overflow, slot design


Suits 40 mm overflow waste (not supplied)


INSTALLATION The bath can be installed using a flexible connector pipe (not

supplied).

The bath is supplied with four adjustable support feet on the base frame of the bath. Position the bath and use the adjustable feet to level the bath. Leave a 3mm void between the base of the bath and the floor. Use silicone around the base to seal the bath to the floor. Allow a 20mm gap in the silicone seal as a weephole (gap is designed to reveal any plumbing leakage).

Use acetic cured silicone sealant. Do not use epoxy type adhesives. Always use the actual product to verify placement.

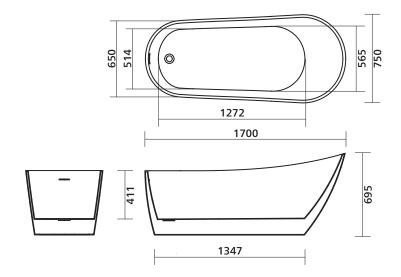



Leave a 3mm gap between base of bath and floor. Use silicone to seal base of bath to floor, leaving a 20mm weephole.







Please note

- All measurements are in millimetres.
- Dimensions are nominal and subject to normal manufacturing variations.
- Fixing: Use silicone sealant. Do not use epoxy type adhesives.
- Specifications may vary without notice as part of our continuous improvement practices.
- Clean with a damp cloth. Do not use abrasive cleaners, liquids or pastes.