



Rinnai

Inverter Multi Split System

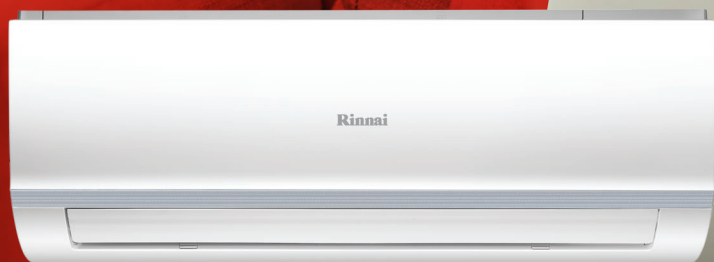

The Perfect Multi Room Solution

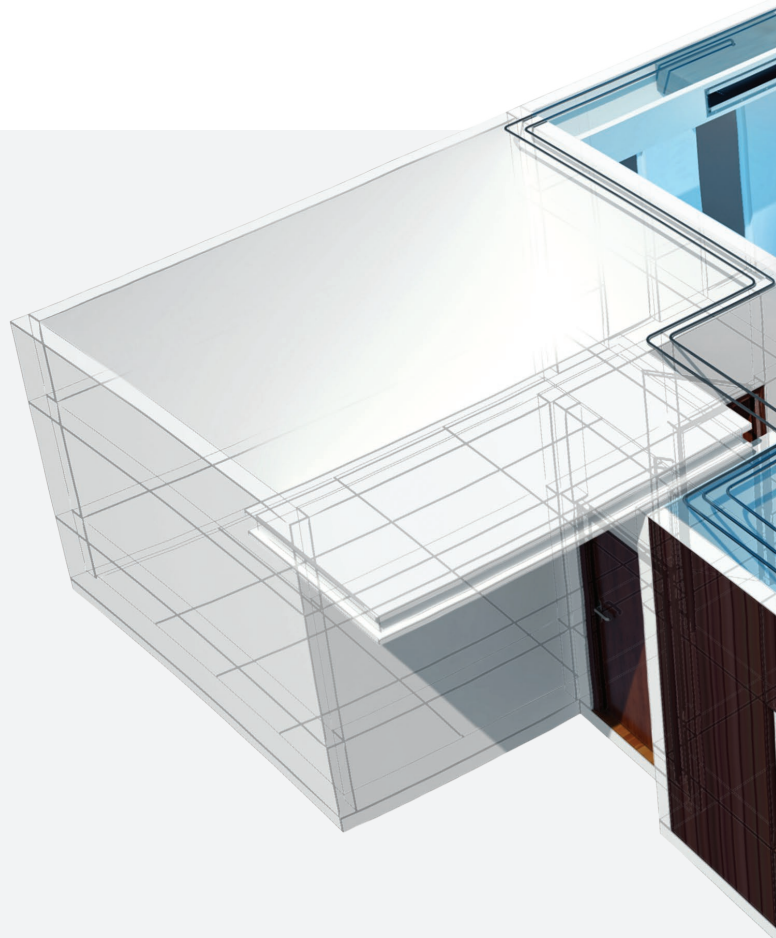

Economical Solutions

When your home requires heating or cooling in more than one room, or independent room control is needed, the Rinnai Inverter Multi Split System is the simplest way to heat or cool up to five individual rooms with only one outdoor unit.

Traditionally, five rooms would require five indoor units and five outdoor units. This does not allow for the most efficient use of your outdoor space, and can create quite an obtrusive appearance to your home. Rinnai Inverter Multi Split Systems solves this problem and provides individual control of the air conditioning in each room. This optimises comfort and saves on running costs by either only heating or cooling individual rooms as required.

The Rinnai Inverter Multi Split Systems have a choice of two indoor unit types in multiple combinations. Rinnai have Hi-Wall and Slim Ducted models ranging up to 7.0kW. There are 4 Outdoor units with cooling capacities ranging from 7.1kW up to 13.3kW, so Rinnai has a system configuration and capacity to suit virtually any requirement.

Summer Cool and Winter Warm

During operation, a sophisticated control system constantly monitors the system parameters to maintain your desired climate setting. 3D DC synchronisation ensures a fast and controlled warm-up or cool-down of your spaces.

Features

- Heating or cooling up to 5 separate rooms
- For homes with limited space for ducting
- The ability to turn individual rooms On or Off as required
- Individual control of room temperature



Comfort without compromise

With the latest in technology, the Rinnai Inverter Multi Split System quietly maintains steady, stable comfort conditions with quiet, efficient performance. Turbo mode, with its rapid cool down or warm up, helps achieve the desired room temperature in the shortest possible time.



*Hi-Wall indoor unit only

Feature packed Hi-Wall unit



Inverter Multi Split

The stylish Hi-Wall indoor units also have vertical and horizontal swing louvre functions, which assist in achieving a perfectly distributed, comfortable temperature throughout the room.

The Rinnai Inverter Multi Hi-Wall has the perfect balance of pleasing aesthetics and practical functionality. All models have an LED display, sleep mode and auto-restart. A discreet, easy to read wireless remote control sits neatly in a magnetic wall mount.


5 Year Warranty

A comprehensive 5 year parts and labour warranty provides you with total peace of mind. Fully supported by our national service capability.


Wi-Fi Control

The Rinnai Hi Wall Multi features Wi-Fi control via an app. Simple activation and ease of use, the App can be downloaded via Google Play or iTunes on a compatible mobile device. Once installed and registered, you can operate your appliance on the go.

Basic functions like on/off, temperature control and fan speed can be accessed through the App. Best of all, the Wi-Fi control allows you to switch on your air conditioner from outside the home – creating the ultimate in convenience and comfort.

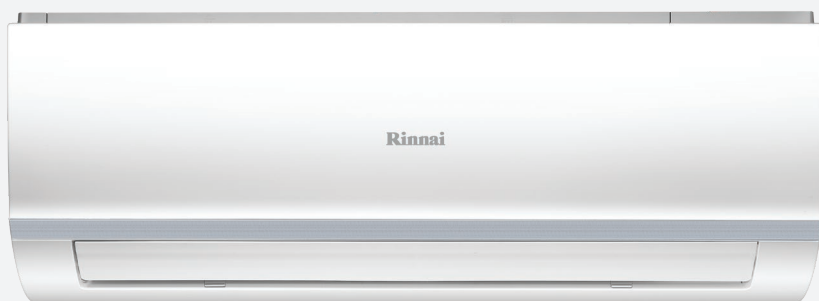

Out of Sight Slim Ducted unit

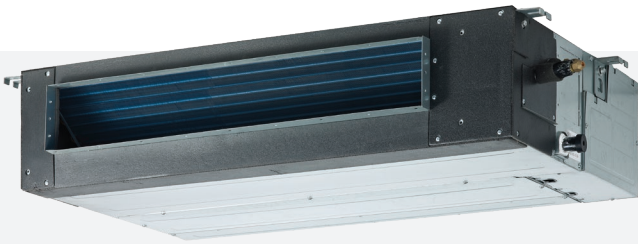

Compact and space saving in design, the Rinnai Inverter Multi Slim Ducted indoor unit is ideal for tight spaces. Hidden away in a bulkhead or a ceiling cavity, with excellent acoustic characteristics, this ultra slim unit also has flexible installation configuration options. It might be compact in size, but still has the power needed to direct beautifully conditioned air throughout the room, and is controlled via a wired wall control. The Rinnai Multi Slim Ducted models do not have Wi-Fi capability.

Smart 3D DC Inverter

A faster, more controlled warm-up or cool-down is achieved by the advanced inverter control systems. It combines three Direct Current (DC) motor technologies working in perfect unison to provide you with:

- Higher efficiency
- Synchronised performance
- Lower running costs in comparison to conventional air conditioners



Outdoor Unit



Multi Outdoor Unit		MON3H071	MON4H09	MON5H11	MON5H13	
Maximum Number of connected Indoor Units	Qty	3	4	5	5	
Power Supply (To Outdoor Unit)	V-Ph-Hz	220~240 -1-50				
Cooling	Rated Capacity (Range)	kW	7.1 (1.7 ~ 9.3)	9.6 (1.7 ~ 11.0)	10.7 (1.7 ~ 12.7)	13.3 (1.7 ~ 15.1)
	Rated Input Power	W	1923	2478	2995	3819
	Rated Input Current	A	8.57	10.94	16.75	16.75
	AEER	W/W	3.41	3.78	3.47	3.40
	Star Rating		2.0	3.0	2.0	2.0
	Non-operational Power	W	18.0	18.0	24.0	24
Heating	Rated Capacity (Range)	kW	7.4 (1.8 ~ 9.6)	9.7 (1.8 ~ 11.0)	10.9 (1.8 ~ 13.5)	14.5 (1.8 ~ 15.5)
	Rated Input Power	W	1868	2580	2798	4167
	Rated Input Current	A	8.27	11.38	12.42	18.27
	ACOP	W/W	3.79	3.65	3.80	3.40
	Star Rating		3.0	2.5	3.0	2.0
	Non-operational Power	W	20.0	20.0	25.0	25.0
Maximum Input Current	A	14.5	17.0	22.0	27.0	
Compressor	Type	DC Twin Rotary				
Sound Power Level	dB(A)	69	69	73	73	
Sound Pressure Level @ 1m		60	61	64	64	
Dimensions	Net (W x D x H)	mm	845 x 363 x 702	946 x 410 x 810	946 x 410 x 810	952 x 415 x 1333
	Gross (W x D x H)	mm	965 x 395 x 755	1090 x 500 x 865	1090 x 500 x 865	1095 x 495 x 1480
	Net / Gross Weight	kg	55 / 59	71 / 76	77 / 82	102 / 116
Refrigerant	Type	R410A				
Refrigerant Piping	Connection Size: Liquid Line	mm	3x Φ6.35	4x Φ6.35	5x Φ6.35	5x Φ6.35
	Connection Size: Gas		3x Φ9.52	3x Φ9.52 1x Φ12.7	4x Φ9.52 1x Φ12.7	3x Φ9.52 2x Φ12.7
	Maximum Total System Pipe Length	m	60	80	80	80
	Pre-Charged Length		30	40	50	50
	Maximum Length Per Indoor Unit		25	30	30	30
	Maximum Vertical Separation Outdoor Unit ABOVE Indoor Unit		10	10	10	10
	Maximum Vertical Separation Outdoor Unit BELOW Indoor Unit		15	15	15	15
	Maximum Height Difference Between Indoor Units		10	10	10	10
Ambient Temperature Limits	Cooling	°C	-15 ~ 50			
	Heating		-15 ~ 24			

Wall Mounted



Multi Indoor Unit - Wall Mounted			HINRA20M	HINRA26M	HINRA35M	HINRA50M	HINRA70M
Power Supply		V-Ph-Hz	220~240 -1-50				
Cooling	Rated Capacity	kW	2.0	2.6	3.5	5.2	7.0
	Rated Input Power	W	20	20	30	30	58
	Rated Input Current	A	0.10	0.10	0.13	0.13	0.30
Heating	Rated Capacity	kW	2.3	2.8	3.8	5.1	7.5
	Rated Input Power	W	20	20	32	32	60
	Rated Input Current	A	0.11	0.11	0.15	0.15	0.33
Airflow (Hi / Med / Lo)		L/s	131 / 100 / 70	167 / 134 / 78	195 / 159 / 98	334 / 237 / 159	403 / 356 / 145
Sound Pressure (Hi / Med / Lo) @1.4m		dB(A)	40 / 35 / 28	43 / 37 / 28	45 / 38 / 28	45 / 42 / 29	49 / 44 / 32
Dimensions	Net (W x D x H)	mm	717 x 193 x 302	805 x 193 x 302	964 x 222 x 325	964 x 222 x 325	1106 x 232 x 342
	Gross (W x D x H)		785 x 285 x 375	875 x 285 x 375	1045 x 305 x 405	1045 x 305 x 405	1195 x 315 x 420
	Net / Gross Weight	kg	7.0 / 9.3	8.5 / 11.0	10.3 / 14.0	10.4 / 14.1	13.7 / 17.6
	Refrigeration Pipe Size: Liquid / Gas	mm	Φ6.35 / Φ9.52	Φ6.35 / Φ9.52	Φ6.35 / Φ12.7	Φ6.35 / Φ12.7	Φ9.52 + Φ15.9
Controller		Type	Wireless Remote Control				
Operating Range	Cooling	°C	17 ~ 32				
	Heating		0 ~ 30				

Ducted



Multi Indoor Unit - Ducted			DINSD261M	DINSD351M	DINSD501M	DINSD701M
Power Supply		V-Ph-Hz	220~240 -1-50			
Cooling	Rated Capacity	kW	2.6	3.5	5.2	7.1
	Rated Input Power	W	80	80	120	120
	Rated Input Current	A	1.11	1.11	1.5	1.5
Heating	Rated Capacity	kW	2.9	3.3	5.5	7.3
	Rated Input Power	W	80	50	120	120
	Rated Input Current	A	0.11	1.11	1.5	1.5
Airflow (Hi / Med / Lo)		L/s	139 / 133 / 84	139 / 133 / 84	236 / 220 / 181	361 / 333 / 250
Maximum External Static Pressure (Hi)		Pa	60	60	100	160
Sound Pressure (Hi / Med / Lo) @1.4m		dB(A)	38 / 34 / 27	38 / 34 / 27	40 / 39 / 37	43 / 40 / 38
Dimensions	Net (W x D x H)	mm	700x 506 x 200	700 x 506 x 200	880 x 674 x 210	1100 x 774 x 249
	Gross (W x D x H)		860 x 540 x 275	860 x 540 x 275	1070 x 725 x 270	1305 x 805 x 305
	Net / Gross Weight	kg	18 / 22	18 / 22	23 / 29	30 / 37
	Supply Air Duct Connection (W x H)	mm	537 x 152	537 x 152	706 x 136	926 x 175
	Return Air Duct Connection (W x H)		599 x 186	599 x 186	782 x 190	1001 x 228
	Refrigeration Pipe Size: Liquid / Gas		Φ6.35 / Φ9.52	Φ6.35 / Φ9.52	Φ6.35 / Φ12.7	Φ9.52 + Φ15.9
Condensate Drain Pump Connection	OD Φ25					
Controller		Type	Wired Controller - 12m Cable			
Operating Range	Cooling	°C	17 ~ 32			
	Heating		0 ~ 30			

Capacities tested in accordance with AS/NZS 3823.3, with 5m interconnecting length for all attached Indoor Units. With our policy of continuous improvement, we reserve the right to change, or discontinue at any time, specifications or designs without notice.

Table 1

Rinnai Outdoor Model: MON3H071

Rinnai Indoor Hi-Wall: HINRA20M, HINRA26M, HINRA35M, HINRA50M, HINRA70M

Rinnai Indoor Ducted: DINSD261M, DINSD351M, DINSD501M, DINSD701M

Indoor Unit Combinations				Cooling						Heating					
Operation	Unit ID			Capacity of each Indoor Unit (kW)			System Capacity (kW)			Capacity of each Indoor Unit (kW)			System Capacity (kW)		
	Unit A	Unit B	Unit C	Room A	Room B	Room C	Min	Rated	Max	Room A	Room B	Room C	Min	Rated	Max
1 Unit	20			2.85			1.71	2.85	3.65	2.96			1.78	2.96	3.79
	26			3.16			2.05	3.16	4.04	3.28			2.13	3.28	4.20
	35			3.68			2.39	3.68	4.71	3.75			2.44	3.75	4.80
	50			5.05			3.13	5.05	6.46	5.22			3.24	5.22	6.68
	70			7.08			4.39	7.08	9.06	6.55			4.06	6.55	8.38
2 Units	20	20		2.43	2.43		3.01	4.86	5.59	2.56	2.56		3.17	5.12	5.89
	20	26		2.28	2.97		3.26	5.25	6.04	2.37	3.08		3.38	5.45	6.27
	20	35		2.22	3.54		3.57	5.76	6.62	2.21	3.53		3.56	5.74	6.60
	20	50		1.87	4.67		4.05	6.54	7.52	1.95	4.88		4.23	6.83	7.85
	20	70		1.66	5.80		4.63	7.46	8.58	1.84	6.42		5.12	8.26	9.50
	26	26		2.72	2.72		3.38	5.45	6.27	2.79	2.79		3.46	5.58	6.42
	26	35		2.80	3.44		3.87	6.24	7.18	2.63	3.23		3.63	5.86	6.74
	26	50		2.31	4.44		4.18	6.75	7.76	2.51	4.83		4.55	7.34	8.44
	26	70		2.13	5.70		4.75	7.63	8.77	2.25	5.60		4.87	7.85	9.05
	35	35		3.36	3.36		4.17	6.72	7.73	3.36	3.36		4.17	6.72	7.73
	35	50		2.74	4.54		4.51	7.28	8.37	3.12	5.16		5.13	8.28	9.52
	35	70		2.72	5.03		4.80	7.75	8.92	2.88	5.42		5.15	8.30	9.55
	50	50		3.85	3.85		4.77	7.70	8.85	4.05	4.05		5.02	8.10	9.32
3 Units	20	20	20	2.20	2.20	2.20	4.09	6.60	7.59	2.27	2.27	2.27	4.22	6.80	7.82
	20	20	26	2.04	2.04	2.65	4.17	6.72	7.73	2.10	2.10	2.73	4.29	6.92	7.96
	20	20	35	1.82	1.82	2.91	4.06	6.55	7.62	1.87	1.87	3.01	4.16	6.75	7.76
	20	20	50	1.64	1.64	4.11	4.58	7.39	8.60	1.63	1.63	4.34	4.68	7.59	8.73
	20	20	70	1.45	1.45	5.08	4.95	7.99	9.29	1.66	1.66	4.42	4.77	7.73	8.90
	20	26	26	1.82	2.37	2.37	4.06	6.55	7.62	1.87	2.43	2.44	4.16	6.75	7.76
	20	26	35	1.85	2.40	2.96	4.47	7.21	8.39	1.90	2.47	3.05	4.57	7.41	8.53
	20	26	50	1.59	2.07	3.97	4.73	7.63	8.87	1.63	2.12	4.09	4.82	7.83	9.00
	20	35	35	1.68	2.93	2.93	4.67	7.54	8.77	1.72	3.00	3.02	4.77	7.73	8.90
	20	35	50	1.47	2.58	3.68	4.79	7.73	8.99	1.52	2.67	3.83	4.94	8.02	9.22
	26	26	26	2.35	2.35	2.35	4.37	7.05	8.20	2.43	2.43	2.44	4.50	7.30	8.40
	26	26	35	2.23	2.23	3.00	4.63	7.47	8.68	2.29	2.29	3.09	4.72	7.66	8.82
	26	26	50	1.96	1.96	3.77	4.76	7.68	8.94	1.99	1.99	3.85	4.82	7.83	9.00
	26	35	35	2.07	2.78	2.78	4.73	7.63	8.87	2.12	2.85	2.86	4.82	7.83	9.00
	26	35	50	1.87	2.52	3.60	4.96	8.00	9.30	1.81	2.44	3.49	4.77	7.73	8.90
35	35	35	2.58	2.58	2.58	4.79	7.73	9.30	2.67	2.67	2.68	4.94	8.02	9.22	

Capacities tested in accordance with AS/NZS 3823.3, with 5m interconnecting length for all attached Indoor Units. With our policy of continuous improvement, we reserve the right to change, or discontinue at anytime, specifications or designs without notice.

Table 2

Rinnai Outdoor Model: MON4H09

Rinnai Indoor Hi-Wall: HINRA20M, HINRA26M, HINRA35M, HINRA50M, HINRA70M

Rinnai Indoor Ducted: DINSD261M, DINSD351M, DINSD501M, DINSD701M

Indoor Unit Combinations					Cooling							Heating						
Operation	Unit ID				Capacity of each Indoor Unit (kW)				System Capacity (kW)			Capacity of each Indoor Unit (kW)				System Capacity (kW)		
	Unit A	Unit B	Unit C	Unit D	Room A	Room B	Room C	Room D	Min	Rated	Max	Room A	Room B	Room C	Room D	Min	Rated	Max
1 Unit	20				2.85				1.71	2.85	3.65	2.96				1.78	2.96	3.79
	26				3.16				2.05	3.16	4.04	3.28				2.13	3.28	4.20
	35				3.68				2.39	3.68	4.71	3.75				2.44	3.75	4.80
	50				5.05				3.13	5.05	6.46	5.22				3.24	5.22	6.68
	70				7.08				4.39	7.08	9.06	6.55				4.06	6.55	8.38
2 Units	20	20			2.43	2.43			3.01	4.86	5.59	2.56	2.56			3.17	5.12	5.89
	20	26			2.28	2.97			3.26	5.25	6.04	2.37	3.08			3.38	5.45	6.27
	20	35			2.22	3.54			3.57	5.76	6.62	2.21	3.53			3.56	5.74	6.60
	20	50			1.87	4.67			4.05	6.54	7.52	1.95	4.88			4.23	6.83	7.85
	20	70			1.66	5.80			4.63	7.46	8.58	1.84	6.42			5.12	8.26	9.50
	26	26			2.72	2.72			2.29	5.45	6.65	2.79	2.79			2.34	5.58	6.81
	26	35			2.80	3.44			2.62	6.24	7.61	2.63	3.23			2.46	5.86	7.15
	26	50			2.31	4.44			2.84	6.75	8.24	2.51	4.83			3.08	7.34	8.95
	26	70			2.13	5.75			4.89	7.88	9.06	2.25	6.07			5.16	8.32	9.57
	35	35			3.36	3.36			2.82	6.72	8.20	3.36	3.36			2.82	6.72	8.20
	35	50			2.74	4.54			3.06	7.28	8.88	3.12	5.16			3.48	8.28	10.10
	35	70			2.72	5.43			5.05	8.15	9.37	2.88	5.77			5.36	8.65	9.95
	50	50			4.04	4.04			3.40	8.09	9.87	4.04	4.04			3.40	8.09	9.87
3 Units	20	20	20		2.20	2.20	2.20		2.77	6.60	8.05	2.27	2.27	2.27		2.86	6.80	8.30
	20	20	26		2.04	2.04	2.65		2.82	6.72	8.20	2.10	2.10	2.73		2.91	6.92	8.44
	20	20	35		1.93	1.93	3.38		3.04	7.25	8.84	2.07	2.07	3.31		3.13	7.45	9.09
	20	20	50		1.82	1.82	4.54		3.44	8.18	9.98	1.80	1.80	4.78		3.52	8.38	10.22
	20	20	70		1.61	1.61	5.63		3.71	8.84	10.78	1.84	1.84	4.87		3.59	8.54	10.42
	20	26	26		2.01	2.62	2.62		3.04	7.25	8.84	2.07	2.69	2.69		3.13	7.45	9.09
	20	26	35		2.05	2.66	3.27		3.35	7.98	9.74	2.10	2.73	3.36		3.44	8.18	9.98
	20	26	50		1.78	2.32	4.46		3.60	8.56	10.44	1.78	2.32	4.46		3.60	8.56	10.44
	20	26	70		1.53	1.98	5.34		3.72	8.85	10.80	1.47	1.91	5.15		3.59	8.54	10.42
	20	35	35		1.85	3.24	3.24		3.50	8.34	10.17	1.90	3.32	3.32		3.59	8.54	10.42
	20	35	50		1.65	2.88	4.12		3.63	8.65	10.55	1.65	2.88	4.12		3.63	8.65	10.55
	26	26	26		2.60	2.60	2.60		3.28	7.80	9.52	2.69	2.69	2.69		3.39	8.06	9.83
	26	26	35		2.47	2.47	3.32		3.47	8.26	10.08	2.47	2.47	3.32		3.47	8.26	10.08
	26	26	50		2.19	2.19	4.22		3.61	8.60	10.49	2.19	2.19	4.22		3.61	8.60	10.49
	26	35	35		2.29	3.08	3.08		3.54	8.44	10.30	2.34	3.15	3.15		3.63	8.64	10.54
26	35	50		2.07	2.79	3.99		3.72	8.85	10.80	2.00	2.69	3.85		3.59	8.54	10.42	
35	35	35		2.85	2.85	2.85		3.59	8.55	10.43	2.95	2.95	2.95		3.72	8.85	10.80	

Table 2: Continued...

Rinnai Outdoor Model: MON4H09

Rinnai Indoor Hi-Wall: HINRA20M, HINRA26M, HINRA35M, HINRA50M, HINRA70M

Rinnai Indoor Ducted: DINSD261M, DINSD351M, DINSD501M, DINSD701M

Indoor Unit Combinations					Cooling							Heating						
Operation	Unit ID				Capacity of each Indoor Unit (kW)				System Capacity (kW)			Capacity of each Indoor Unit (kW)				System Capacity (kW)		
	Unit A	Unit B	Unit C	Unit D	Room A	Room B	Room C	Room D	Min	Rated	Max	Room A	Room B	Room C	Room D	Min	Rated	Max
4 Units	20	20	20	20	1.90	1.90	1.90	1.90	2.45	7.60	9.27	1.95	1.95	1.95	1.95	2.45	7.80	9.52
	20	20	20	26	1.83	1.83	1.83	2.38	3.22	7.86	9.59	1.83	1.83	1.83	2.38	3.22	7.86	9.59
	20	20	20	35	1.77	1.77	1.77	2.83	3.34	8.15	9.94	1.79	1.79	1.79	2.87	3.38	8.25	10.06
	20	20	20	50	1.59	1.59	1.59	4.20	3.67	8.96	10.93	1.53	1.53	1.53	4.06	3.55	8.66	10.57
	20	20	26	26	1.75	1.75	2.28	2.28	3.31	8.07	9.85	1.80	1.80	2.34	2.34	3.39	8.27	10.09
	20	20	26	35	1.73	1.73	2.24	2.76	3.47	8.46	10.32	1.75	1.75	2.27	2.80	3.51	8.56	10.44
	20	20	35	35	1.67	1.67	2.66	2.66	3.55	8.66	10.57	1.70	1.70	2.73	2.73	3.63	8.86	10.81
	20	26	26	26	1.68	2.19	2.19	2.19	3.38	8.25	10.06	1.70	2.22	2.22	2.22	3.42	8.35	10.19
	20	26	26	35	1.70	2.20	2.20	2.71	3.62	8.82	10.76	1.72	2.23	2.23	2.74	3.66	8.92	10.88
	20	26	35	35	1.63	2.12	2.61	2.61	3.68	8.98	10.96	1.64	2.14	2.63	2.63	3.71	9.04	11.03
	26	26	26	26	2.13	2.13	2.13	2.13	3.49	8.52	10.39	2.16	2.16	2.16	2.16	3.53	8.62	10.52
	26	26	26	35	2.09	2.09	2.09	2.58	3.63	8.86	10.81	2.12	2.12	2.12	2.61	3.67	8.96	10.93

Capacities tested in accordance with AS/NZS 3823.3, with 5m interconnecting length for all attached Indoor Units. With our policy of continuous improvement, we reserve the right to change, or discontinue at any time, specifications or designs without notice.

Table 3

Rinnai Outdoor Model: MON5H11

Rinnai Indoor Hi-Wall: HINRA20M, HINRA26M, HINRA35M, HINRA50M, HINRA70M

Rinnai Indoor Ducted: DINSD261M, DINSD351M, DINSD501M, DINSD701M

Indoor Unit Combinations						Cooling							Heating								
Operation	Unit ID					Capacity of each Indoor Unit (kW)					System Capacity (kW)			Capacity of each Indoor Unit (kW)					System Capacity (kW)		
	Unit A	Unit B	Unit C	Unit D	Unit E	Room A	Room B	Room C	Room D	Room E	Min	Rated	Max	Room A	Room B	Room C	Room D	Room E	Min	Rated	Max
1 Unit	20					2.85					1.71	2.85	3.70	2.96					1.78	2.96	3.55
	26					3.16					1.90	3.16	3.79	3.28					1.97	3.28	3.94
	35					3.68					2.21	3.68	4.42	3.75					2.25	3.75	4.50
	50					5.05					3.03	5.05	5.81	5.22					3.13	5.22	6.00
	70					7.08					4.25	7.08	8.14	6.55					3.93	6.55	7.53
2 Units	20	20				2.43	2.43				3.01	4.86	5.59	2.56	2.56				3.17	5.12	5.89
	20	26				2.28	2.97				3.26	5.25	6.04	2.37	3.08				3.38	5.45	6.27
	20	35				2.22	3.54				3.57	5.76	6.62	2.21	3.53				3.56	5.74	6.60
	20	50				1.87	4.67				4.05	6.54	7.52	1.95	4.88				4.23	6.83	7.85
	20	70				1.66	5.80				4.63	7.46	8.58	1.84	6.42				5.12	8.26	9.50
	26	26				2.72	2.72				2.29	5.45	6.65	2.79	2.79				2.34	5.58	6.81
	26	35				2.80	3.44				2.62	6.24	7.61	2.63	3.23				2.46	5.86	7.15
	26	50				2.31	4.44				2.84	6.75	8.24	2.51	4.83				3.08	7.34	8.95
	26	70				2.13	5.75				4.89	7.88	9.06	2.25	6.07				5.16	8.32	9.57
	35	35				3.36	3.36				2.82	6.72	8.20	3.36	3.36				2.82	6.72	8.20
	35	50				2.74	4.54				3.06	7.28	8.88	3.12	5.16				3.48	8.28	10.10
	35	70				2.72	5.43				5.05	8.15	9.37	2.88	5.77				5.36	8.65	9.95
	50	50				4.04	4.04				3.40	8.09	9.87	4.04	4.04				3.40	8.09	9.87

Table 3: Continued...

Rinnai Outdoor Model: MON5H11

Rinnai Indoor Hi-Wall: HINRA20M, HINRA26M, HINRA35M, HINRA50M, HINRA70M

Rinnai Indoor Ducted: DINSD261M, DINSD351M, DINSD501M, DINSD701M

Indoor Unit Combinations					Cooling								Heating								
Operation	Unit ID					Capacity of each Indoor Unit (kW)					System Capacity (kW)			Capacity of each Indoor Unit (kW)					System Capacity (kW)		
	Unit A	Unit B	Unit C	Unit D	Unit E	Room A	Room B	Room C	Room D	Room E	Min	Rated	Max	Room A	Room B	Room C	Room D	Room E	Min	Rated	Max
3 Units	20	20	20			2.20	2.20	2.20			3.30	6.60	7.26	2.40	2.40	2.40			3.60	7.20	7.92
	20	20	26			2.20	2.20	2.86			3.63	7.26	7.99	2.40	2.40	3.12			3.96	7.92	8.71
	20	20	35			2.10	2.10	3.68			3.94	7.88	8.66	2.40	2.40	4.20			4.50	9.00	9.90
	20	20	50			2.10	2.10	5.25			4.72	9.45	9.92	2.20	2.20	5.50			4.95	9.90	10.40
	20	20	70			1.90	1.90	5.55			4.68	9.35	9.82	2.10	2.10	6.47			5.34	10.67	11.20
	20	26	26			2.20	2.86	2.86			3.96	7.92	8.71	2.40	3.12	3.12			4.32	8.64	9.50
	20	26	35			2.10	2.70	3.70			4.25	8.50	9.36	2.40	3.10	4.22			4.86	9.72	10.69
	20	26	50			2.10	2.65	4.66			4.70	9.41	9.88	2.30	2.76	5.50			5.28	10.56	11.09
	20	26	70			1.80	2.40	5.66			4.93	9.86	10.35	1.90	2.50	6.85			5.63	11.25	11.81
	20	35	35			2.08	3.55	3.55			4.59	9.18	9.64	2.40	3.90	4.05			5.18	10.35	10.87
	20	35	50			2.10	3.60	4.59			5.14	10.29	10.80	2.20	3.70	5.12			5.51	11.02	11.58
	20	35	70			1.80	3.20	5.63			5.31	10.62	11.16	1.90	3.40	6.82			6.06	12.12	12.73
	20	50	50			1.80	4.50	4.50			5.40	10.80	11.34	2.10	5.07	5.07			6.12	12.24	12.85
	20	50	70			1.80	4.10	5.30			5.60	11.20	11.42	1.90	4.12	6.30			6.16	12.32	12.57
	20	70	70			1.80	4.70	4.70			5.60	11.20	11.54	1.82	5.25	5.25			6.16	12.32	12.57
	26	26	26			2.86	2.86	2.86			4.29	8.58	9.44	3.12	3.12	3.12			4.68	9.36	10.30
	26	26	35			2.76	2.76	3.62			4.57	9.14	10.05	2.80	2.80	3.97			4.78	9.57	10.53
	26	26	50			2.40	2.40	4.38			4.59	9.18	10.10	2.65	2.65	5.41			5.36	10.71	11.78
	26	26	70			2.40	2.40	5.45			5.12	10.25	10.76	6.31	2.76	2.76			5.92	11.83	12.43
	26	35	35			2.63	3.63	3.63			4.94	9.89	10.88	2.90	3.83	3.83			5.28	10.56	11.62
	26	35	50			2.40	3.30	4.62			5.16	10.32	10.84	2.70	3.70	5.26			5.83	11.66	12.24
	26	35	70			2.30	3.05	5.13			5.24	10.48	11.00	2.50	3.40	6.54			6.22	12.44	13.07
	26	50	50			2.31	4.20	4.20			5.36	10.71	11.25	2.40	4.91	4.91			6.11	12.22	12.83
	26	50	70			2.10	3.80	5.05			5.48	10.95	11.28	2.20	4.10	6.02			6.16	12.32	12.57
	35	35	35			3.36	3.36	3.36			5.04	10.08	10.58	3.85	3.85	3.85			5.78	11.55	12.13
	35	35	50			3.20	3.20	4.04			5.22	10.44	10.96	3.40	3.40	4.84			5.82	11.64	12.22
	35	35	70			2.90	2.90	5.12			5.46	10.92	11.79	3.10	3.10	6.12			6.16	12.32	12.57
	35	50	50			2.90	3.95	3.95			5.40	10.80	11.34	3.15	4.50	4.50			6.08	12.15	12.76
35	50	70			2.40	3.80	4.96			5.58	11.16	11.49	2.80	3.90	5.62			6.16	12.32	12.57	

Table 3: Continued...

Rinnai Outdoor Model: MON5H11

Rinnai Indoor Hi-Wall: HINRA20M, HINRA26M, HINRA35M, HINRA50M, HINRA70M

Rinnai Indoor Ducted: DINSD261M, DINSD351M, DINSD501M, DINSD701M

Indoor Unit Combinations					Cooling								Heating								
Operation	Unit ID					Capacity of each Indoor Unit (kW)					System Capacity (kW)			Capacity of each Indoor Unit (kW)					System Capacity (kW)		
	Unit A	Unit B	Unit C	Unit D	Unit E	Room A	Room B	Room C	Room D	Room E	Min	Rated	Max	Room A	Room B	Room C	Room D	Room E	Min	Rated	Max
4 Units	20	20	20	20		2.20	2.20	2.20	2.20		4.40	8.80	9.68	2.40	2.40	2.40	2.40		4.80	9.60	10.56
	20	20	20	26		2.10	2.10	2.10	2.73		4.52	9.03	9.93	2.20	2.20	2.20	2.86		4.73	9.46	10.41
	20	20	20	35		2.10	2.10	2.10	3.68		4.99	9.98	10.97	2.20	2.20	2.20	3.85		5.22	10.45	11.50
	20	20	20	50		2.05	2.05	2.05	4.30		5.22	10.45	11.50	2.05	2.05	2.05	5.18		5.66	11.33	12.46
	20	20	20	70		1.75	1.75	1.75	5.80		5.52	11.05	11.27	1.90	1.90	1.90	6.39		6.04	12.09	12.33
	20	20	26	26		2.10	2.10	2.73	2.73		4.83	9.66	10.63	2.20	2.20	2.86	2.86		5.06	10.12	11.13
	20	20	26	35		2.05	2.05	2.70	3.60		5.20	10.40	11.44	2.20	2.20	2.90	3.81		5.56	11.11	12.22
	20	20	26	50		1.90	1.90	2.50	4.37		5.34	10.67	11.74	2.10	2.10	2.80	4.83		5.92	11.83	13.02
	20	20	26	70		1.75	1.75	2.20	5.86		5.78	11.56	11.79	1.80	1.80	2.40	6.24		6.12	12.24	12.48
	20	20	35	35		1.90	1.90	3.32	3.33		5.22	10.45	11.50	2.02	2.02	3.23	4.28		5.78	11.55	12.70
	20	20	35	50		1.80	1.80	3.20	4.45		5.62	11.25	11.59	2.02	2.02	3.40	4.69		6.06	12.12	13.34
	20	20	35	70		1.60	1.60	2.90	5.50		5.80	11.60	11.83	1.80	1.80	2.90	5.82		6.16	12.32	12.57
	20	20	50	50		1.85	1.85	4.10	4.10		5.95	11.90	12.14	1.70	1.70	4.46	4.46		6.16	12.32	12.57
	20	20	50	70		1.60	1.60	3.90	4.90		6.00	12.00	12.24	1.70	1.70	3.90	5.02		6.16	12.32	12.57
	20	26	26	26		2.13	2.72	2.72	2.72		5.14	10.29	10.50	2.20	2.86	2.86	2.86		5.39	10.78	11.00
	20	26	26	35		1.95	2.55	2.55	3.44		5.24	10.49	10.70	2.20	2.70	2.70	3.64		5.62	11.24	11.46
	20	26	26	50		1.90	2.50	2.50	4.08		5.49	10.98	11.20	2.10	2.50	2.50	4.73		5.92	11.83	12.07
	20	26	35	35		1.90	2.45	3.22	3.22		5.39	10.79	11.00	2.13	2.70	3.50	3.50		5.92	11.83	12.07
	20	26	35	50		1.80	2.30	2.90	4.14		5.57	11.14	11.36	1.90	2.50	3.40	4.38		6.09	12.18	12.43
	20	26	35	70		1.60	2.20	2.70	5.43		5.96	11.93	12.17	1.80	1.80	3.10	5.62		6.16	12.32	12.57
	20	26	50	50		1.60	2.20	3.94	3.94		5.84	11.68	11.91	1.81	2.30	4.15	4.15		6.20	12.41	12.66
	20	35	35	35		1.83	3.14	3.14	3.14		5.62	11.25	11.48	2.11	3.34	3.34	3.34		6.06	12.12	12.37
	20	35	35	50		1.80	3.10	3.10	3.90		5.95	11.90	12.14	1.90	3.20	3.20	4.02		6.16	12.32	12.57
	20	35	35	70		1.60	2.70	2.70	5.00		6.00	12.00	12.24	1.70	2.80	2.80	5.02		6.16	12.32	12.57
	26	26	26	26		2.58	2.57	2.57	2.58		5.15	10.30	10.50	2.52	2.52	2.52	2.53		5.04	10.09	10.29
	26	26	26	35		2.52	2.52	2.52	3.40		5.48	10.96	11.18	2.52	2.52	2.52	3.40		5.48	10.96	11.18
	26	26	26	50		2.40	2.40	2.40	4.06		5.63	11.26	11.49	2.60	2.60	2.60	3.72		5.76	11.52	11.75
	26	26	26	70		2.20	2.20	2.20	4.94		5.77	11.54	11.77	2.20	2.20	2.20	5.72		6.16	12.32	12.57
	26	26	35	35		2.30	2.30	3.07	3.07		5.37	10.74	10.95	2.52	2.52	3.40	3.39		5.92	11.83	12.07
	26	26	35	50		2.30	2.30	3.10	3.94		5.82	11.64	11.88	2.40	2.40	3.20	4.19		6.10	12.19	12.44
	26	26	35	70		2.10	2.10	2.80	5.00		6.00	12.00	12.24	2.10	2.10	2.90	5.22		6.16	12.32	12.57
	26	35	35	35		2.32	2.94	2.94	2.94		5.57	11.14	11.36	2.40	3.13	3.13	3.13		5.90	11.79	12.03
26	35	35	50		2.10	2.80	2.80	3.98		5.84	11.68	11.91	2.10	3.10	3.10	4.02		6.16	12.32	12.57	
35	35	35	35		2.80	2.80	2.80	2.80		5.60	11.20	11.42	3.08	3.08	3.08	3.08		6.16	12.32	12.57	
35	35	35	50		2.70	2.70	2.70	3.90		6.00	12.00	12.24	2.80	2.80	2.80	3.92		6.16	12.32	12.57	

Table 3: Continued...

Rinnai Outdoor Model: MON5H11

Rinnai Indoor Hi-Wall: HINRA20M, HINRA26M, HINRA35M, HINRA50M, HINRA70M

Rinnai Indoor Ducted: DINSD261M, DINSD351M, DINSD501M, DINSD701M

Indoor Unit Combinations					Cooling								Heating								
Operation	Unit ID					Capacity of each Indoor Unit (kW)					System Capacity (kW)			Capacity of each Indoor Unit (kW)					System Capacity (kW)		
	Unit A	Unit B	Unit C	Unit D	Unit E	Room A	Room B	Room C	Room D	Room E	Min	Rated	Max	Room A	Room B	Room C	Room D	Room E	Min	Rated	Max
5 Units	20	20	20	20	20	2.08	2.08	2.08	2.08	2.08	5.25	10.40	11.02	2.20	2.20	2.20	2.20	2.20	5.50	11.00	11.55
	20	20	20	20	26	2.03	2.03	2.03	2.03	2.68	5.56	10.80	11.59	2.10	2.10	2.10	2.10	2.73	5.56	11.13	11.69
	20	20	20	20	35	1.95	1.95	1.95	1.95	3.47	5.64	11.27	11.83	2.10	2.10	2.10	2.10	3.33	5.86	11.73	12.32
	20	20	20	20	50	1.74	1.74	1.74	1.74	4.75	5.85	11.70	12.28	1.90	1.90	1.90	1.90	4.75	6.18	12.35	12.97
	20	20	20	20	70	1.70	1.70	1.70	1.70	5.28	6.04	12.08	12.68	1.80	1.80	1.80	1.80	5.64	6.42	12.84	13.48
	20	20	20	26	26	1.90	1.90	1.90	2.58	2.58	5.43	10.86	11.41	1.90	1.90	1.90	2.58	2.58	5.43	10.86	11.41
	20	20	20	26	35	1.90	1.90	1.90	2.50	3.29	5.75	11.50	12.07	1.90	1.90	1.90	2.50	3.30	5.75	11.50	12.07
	20	20	20	26	50	1.79	1.79	1.79	2.33	4.25	5.98	11.97	12.57	1.90	1.90	1.90	2.50	4.04	6.12	12.24	12.85
	20	20	20	26	70	1.60	1.60	1.60	2.10	5.18	6.04	12.08	12.68	1.70	1.70	1.70	2.40	5.34	6.42	12.84	13.48
	20	20	20	35	35	1.70	1.70	1.70	3.17	3.17	5.72	11.44	12.01	1.80	1.80	1.80	3.15	3.15	5.85	11.70	12.28
	20	20	20	35	50	1.70	1.70	1.70	2.90	4.08	6.04	12.08	12.68	1.80	1.80	1.80	3.00	4.44	6.42	12.84	13.48
	20	20	26	26	26	1.90	1.90	2.47	2.47	2.47	5.60	11.21	11.77	2.05	2.05	2.65	2.65	2.64	6.02	12.04	12.64
	20	20	26	26	35	1.80	1.80	2.40	2.40	3.03	5.72	11.43	12.00	1.90	1.90	2.50	2.50	3.26	6.03	12.06	12.67
	20	20	26	26	50	1.70	1.70	2.20	2.20	4.28	6.04	12.08	12.68	1.80	1.80	2.30	2.30	4.64	6.42	12.84	13.48
	20	20	26	35	35	1.70	1.70	2.30	2.93	2.93	5.78	11.56	12.14	1.80	1.80	2.30	3.17	3.17	6.12	12.24	12.85
	20	20	26	35	50	1.70	1.70	2.20	2.80	3.68	6.04	12.08	12.68	1.80	1.80	2.20	2.90	4.14	6.42	12.84	13.48
	20	20	35	35	35	1.66	1.66	2.76	2.76	2.76	5.80	11.60	12.18	1.82	1.82	3.04	3.04	3.04	6.38	12.76	13.40
	20	20	35	35	50	1.70	1.70	2.50	2.50	3.68	6.04	12.08	12.68	1.70	1.70	2.80	2.80	3.84	6.42	12.84	13.48
	20	26	26	26	26	1.80	2.34	2.34	2.34	2.34	5.58	11.16	11.72	1.91	2.53	2.53	2.53	2.53	6.01	12.03	12.63
	20	26	26	26	35	1.80	2.34	2.34	2.34	3.06	5.94	11.88	12.47	1.80	2.40	2.40	2.40	2.88	5.94	11.88	12.47
	20	26	26	26	50	1.70	2.20	2.20	2.20	3.78	6.04	12.08	12.68	1.80	2.20	2.20	2.20	4.44	6.42	12.84	13.48
	20	26	26	35	35	1.71	2.20	2.20	2.98	2.98	6.04	12.07	12.67	1.80	2.30	2.30	3.19	3.19	6.39	12.78	13.42
	20	26	26	35	50	1.70	2.10	2.10	2.50	3.68	6.04	12.08	12.68	1.70	2.10	2.10	2.90	4.04	6.42	12.84	13.48
	20	26	35	35	35	1.70	2.10	2.76	2.76	2.76	6.04	12.08	12.68	1.70	2.14	3.00	3.00	3.00	6.42	12.84	13.48
	20	35	35	35	35	1.68	2.60	2.60	2.60	2.60	6.04	12.08	12.68	1.64	2.80	2.80	2.80	2.80	6.42	12.84	13.48
	26	26	26	26	26	2.34	2.34	2.34	2.34	2.34	5.85	11.70	12.28	2.34	2.34	2.34	2.34	2.34	5.85	11.70	12.28
	26	26	26	26	35	2.20	2.20	2.20	2.20	2.90	5.85	11.70	12.28	2.30	2.30	2.30	2.30	3.04	6.12	12.24	12.85
	26	26	26	26	50	2.02	2.02	2.02	2.02	4.00	6.04	12.08	12.68	2.10	2.10	2.10	2.10	4.44	6.42	12.84	13.48
	26	26	26	35	35	2.11	2.11	2.11	2.87	2.87	6.04	12.07	12.67	2.20	2.20	2.20	2.95	2.95	6.25	12.50	13.12
	26	26	35	35	35	1.99	1.99	2.70	2.70	2.70	6.04	12.08	12.68	2.10	2.10	2.88	2.88	2.88	6.42	12.84	13.48

Capacities tested in accordance with AS/NZS 3823.3, with 5m interconnecting length for all attached Indoor Units. With our policy of continuous improvement, we reserve the right to change, or discontinue at any time, specifications or designs without notice.

Table 4

Rinnai Outdoor Model: MON5H13

Rinnai Indoor Hi-Wall: HINRA20M, HINRA26M, HINRA35M, HINRA50M, HINRA70M

Rinnai Indoor Ducted: DINSD261M, DINSD351M, DINSD501M, DINSD701M

Indoor Unit Combinations						Cooling							Heating								
Operation	Unit ID					Capacity of each Indoor Unit (kW)					System Capacity (kW)			Capacity of each Indoor Unit (kW)					System Capacity (kW)		
	Unit A	Unit B	Unit C	Unit D	Unit E	Room A	Room B	Room C	Room D	Room E	Min	Rated	Max	Room A	Room B	Room C	Room D	Room E	Min	Rated	Max
1 Unit	20					2.85					1.71	2.85	3.70	2.96					1.78	2.96	3.55
	26					3.16					1.90	3.16	3.79	3.28					1.97	3.28	3.94
	35					3.68					2.21	3.68	4.42	3.75					2.25	3.75	4.50
	50					5.05					3.03	5.05	5.81	5.22					3.13	5.22	6.00
	70					7.08					4.25	7.08	8.14	6.55					3.93	6.55	7.53
2 Units	20	20				2.20	2.20				2.64	4.40	5.06	2.60	2.60				3.12	5.20	5.98
	20	26				2.30	2.76				3.04	5.06	5.82	2.30	3.22				3.31	5.52	6.35
	20	35				2.30	3.75				3.63	6.05	6.96	2.40	4.20				3.96	6.60	7.59
	20	50				2.20	5.50				3.85	7.70	8.86	2.40	5.30				3.85	7.70	8.86
	20	70				1.90	6.83				4.36	8.73	9.17	2.10	7.08				4.59	9.18	9.64
	26	26				2.86	2.86				3.43	5.72	6.58	3.12	3.12				3.74	6.24	7.18
	26	35				2.90	3.81				3.36	6.71	7.72	3.20	4.12				3.66	7.32	8.42
	26	50				2.90	5.08				3.99	7.98	9.18	3.05	5.31				4.18	8.36	9.61
	26	70				2.50	6.81				4.66	9.31	9.78	2.70	7.09				4.90	9.79	10.28
	35	35				3.64	3.64				3.64	7.28	8.37	4.20	4.20				4.20	8.40	9.66
	35	50				3.40	4.93				4.16	8.33	9.58	3.80	5.12				4.46	8.92	10.26
	35	70				3.40	6.79				5.09	10.18	10.69	3.70	7.12				5.41	10.82	11.36
	50	50				4.85	4.85				4.85	9.70	10.18	5.05	5.05				5.05	10.10	10.60
	50	70				4.20	6.24				5.22	10.44	10.96	4.90	6.50				5.70	11.40	11.97
	70	70				5.95	5.95				5.95	11.90	12.02	6.16	6.16				6.16	12.32	12.44

Table 4: Continued...

Rinnai Outdoor Model: MON5H13

Rinnai Indoor Hi-Wall: HINRA20M, HINRA26M, HINRA35M, HINRA50M, HINRA70M

Rinnai Indoor Ducted: DINSD261M, DINSD351M, DINSD501M, DINSD701M

Indoor Unit Combinations						Cooling							Heating								
Operation	Unit ID					Capacity of each Indoor Unit (kW)					System Capacity (kW)			Capacity of each Indoor Unit (kW)					System Capacity (kW)		
	Unit A	Unit B	Unit C	Unit D	Unit E	Room A	Room B	Room C	Room D	Room E	Min	Rated	Max	Room A	Room B	Room C	Room D	Room E	Min	Rated	Max
3 Units	20	20	20			2.20	2.20	2.20			3.30	6.60	7.26	2.40	2.40	2.40			3.60	7.20	7.92
	20	20	26			2.20	2.20	2.86			3.63	7.26	7.99	2.40	2.40	3.12			3.96	7.92	8.71
	20	20	35			2.10	2.10	3.68			3.94	7.88	8.66	2.40	2.40	4.20			4.50	9.00	9.90
	20	20	50			2.10	2.10	5.25			4.72	9.45	9.92	2.20	2.20	5.50			4.95	9.90	10.40
	20	20	70			2.00	2.00	5.68			4.84	9.68	10.16	2.10	2.10	6.47			5.34	10.67	11.20
	20	26	26			2.20	2.86	2.86			3.96	7.92	8.71	2.40	3.12	3.12			4.32	8.64	9.50
	20	26	35			2.10	2.70	3.70			4.25	8.50	9.36	2.40	3.10	4.22			4.86	9.72	10.69
	20	26	50			2.10	2.65	4.66			4.70	9.41	9.88	2.30	2.76	5.50			5.28	10.56	11.09
	20	26	70			2.38	2.40	5.66			5.22	10.44	10.96	1.90	2.50	6.85			5.63	11.25	11.81
	20	35	35			2.08	3.55	3.55			4.59	9.18	9.64	2.40	3.90	4.05			5.18	10.35	10.87
	20	35	50			2.10	3.60	4.59			5.14	10.29	10.80	2.20	3.70	5.12			5.51	11.02	11.58
	20	35	70			2.10	3.20	5.70			5.50	11.00	11.55	1.90	3.40	6.82			6.06	12.12	12.73
	20	50	50			1.80	4.50	4.50			5.40	10.80	11.34	2.10	5.07	5.07			6.12	12.24	12.85
	20	50	70			1.90	4.10	5.76			5.88	11.76	12.00	1.90	4.12	6.30			6.16	12.32	12.57
	20	70	70			1.80	5.50	5.50			6.40	12.80	13.18	1.90	6.05	6.05			7.00	14.00	14.28
	26	26	26			2.86	2.86	2.86			4.29	8.58	9.44	3.12	3.12	3.12			4.68	9.36	10.30
	26	26	35			2.76	2.76	3.62			4.57	9.14	10.05	2.80	2.80	3.97			4.78	9.57	10.53
	26	26	50			2.40	2.40	4.38			4.59	9.18	10.10	2.65	2.65	5.41			5.36	10.71	11.78
	26	26	70			2.40	2.40	5.45			5.12	10.25	10.76	6.31	2.76	2.76			5.92	11.83	12.43
	26	35	35			2.63	3.63	3.63			4.94	9.89	10.88	2.90	3.83	3.83			5.28	10.56	11.62
	26	35	50			2.40	3.30	4.62			5.16	10.32	10.84	2.70	3.70	5.26			5.83	11.66	12.24
	26	35	70			2.39	3.05	5.69			5.57	11.14	11.69	2.50	3.40	6.54			6.22	12.44	13.07
	26	50	50			2.31	4.20	4.20			5.36	10.71	11.25	2.40	4.91	4.91			6.11	12.22	12.83
	26	50	70			2.10	4.10	5.92			6.06	12.12	12.48	2.50	4.50	6.50			6.75	13.50	13.77
	26	70	70			2.35	5.30	5.30			6.47	12.95	13.34	2.40	5.80	5.80			7.00	14.00	14.28
	35	35	35			3.36	3.36	3.36			5.04	10.08	10.58	3.85	3.85	3.85			5.78	11.55	12.13
	35	35	50			3.20	3.20	4.04			5.22	10.44	10.96	3.40	3.40	4.84			5.82	11.64	12.22
	35	35	70			2.95	2.96	5.99			5.95	11.90	12.85	3.40	3.40	6.50			6.65	13.30	13.57
35	50	50			2.90	4.30	4.30			5.87	11.50	12.33	3.15	4.50	4.50			6.08	12.15	12.76	
35	50	70			2.86	4.10	5.90			6.43	12.86	13.25	3.30	4.30	6.40			7.00	14.00	14.28	
35	70	70			2.95	5.35	5.35			6.82	13.65	14.06	3.20	5.40	5.40			7.00	14.00	14.28	

Table 4: Continued...

Rinnai Outdoor Model: MON5H13

Rinnai Indoor Hi-Wall: HINRA20M, HINRA26M, HINRA35M, HINRA50M, HINRA70M

Rinnai Indoor Ducted: DINSD261M, DINSD351M, DINSD501M, DINSD701M

Indoor Unit Combinations						Cooling							Heating								
Operation	Unit ID					Capacity of each Indoor Unit (kW)					System Capacity (kW)			Capacity of each Indoor Unit (kW)					System Capacity (kW)		
	Unit A	Unit B	Unit C	Unit D	Unit E	Room A	Room B	Room C	Room D	Room E	Min	Rated	Max	Room A	Room B	Room C	Room D	Room E	Min	Rated	Max
4 Units	20	20	20	20		2.20	2.20	2.20	2.20		4.40	8.80	9.68	2.40	2.40	2.40	2.40		4.80	9.60	10.56
	20	20	20	26		2.10	2.10	2.10	2.73		4.52	9.03	9.93	2.20	2.20	2.20	2.86		4.73	9.46	10.41
	20	20	20	35		2.10	2.10	2.10	3.68		4.99	9.98	10.97	2.20	2.20	2.20	3.85		5.22	10.45	11.50
	20	20	20	50		2.05	2.05	2.05	4.30		5.22	10.45	11.50	2.05	2.05	2.05	5.18		5.66	11.33	12.46
	20	20	20	70		1.75	1.75	1.75	5.80		5.52	11.05	11.27	1.90	1.90	1.90	6.39		6.04	12.09	12.33
	20	20	26	26		2.10	2.10	2.73	2.73		4.83	9.66	10.63	2.20	2.20	2.86	2.86		5.06	10.12	11.13
	20	20	26	35		2.05	2.05	2.70	3.60		5.20	10.40	11.44	2.20	2.20	2.90	3.81		5.56	11.11	12.22
	20	20	26	50		1.90	1.90	2.50	4.37		5.34	10.67	11.74	2.10	2.10	2.80	4.83		5.92	11.83	13.02
	20	20	26	70		1.79	1.79	2.40	5.99		5.98	11.97	12.21	1.80	1.80	2.40	6.24		6.12	12.24	12.48
	20	20	35	35		1.90	1.90	3.32	3.33		5.22	10.45	11.50	2.02	2.02	3.23	4.28		5.78	11.55	12.70
	20	20	35	50		1.80	1.80	3.20	4.45		5.62	11.25	11.59	2.02	2.02	3.40	4.69		6.06	12.12	13.34
	20	20	35	70		1.80	1.80	3.20	6.10		6.45	12.90	13.16	1.95	1.95	3.40	6.70		7.00	14.00	14.28
	20	20	50	50		1.85	1.85	4.38	4.38		6.23	12.46	12.71	1.90	1.90	4.89	4.89		6.79	13.58	13.85
	20	20	50	70		1.80	1.80	4.20	5.80		6.80	13.60	13.87	1.90	1.90	4.40	6.00		7.10	14.20	14.48
	20	26	26	26		2.13	2.72	2.72	2.72		5.14	10.29	10.50	2.20	2.86	2.86	2.86		5.39	10.78	11.00
	20	26	26	35		1.95	2.55	2.55	3.44		5.24	10.49	10.70	2.20	2.70	2.70	3.64		5.62	11.24	11.46
	20	26	26	50		1.90	2.50	2.50	4.08		5.49	10.98	11.20	2.10	2.50	2.50	4.73		5.92	11.83	12.07
	20	26	35	35		1.90	2.45	3.22	3.22		5.39	10.79	11.00	2.13	2.70	3.50	3.50		5.92	11.83	12.07
	20	26	35	50		1.80	2.30	2.90	4.14		5.57	11.14	11.36	1.98	2.55	3.40	4.91		6.42	12.84	13.09
	20	26	35	70		1.80	2.30	3.10	6.09		6.64	13.29	13.55	1.90	2.50	3.30	6.50		7.10	14.20	14.48
	20	26	50	50		1.80	2.45	4.37	4.37		6.50	12.99	13.25	1.98	2.55	4.89	4.89		7.15	14.31	14.59
	20	26	50	70		1.80	2.20	4.20	5.50		6.85	13.70	13.97	1.90	2.50	4.10	6.00		7.25	14.50	14.79
	20	35	35	35		1.83	3.14	3.14	3.14		5.62	11.25	11.48	2.11	3.34	3.34	3.34		6.06	12.12	12.37
	20	35	35	50		1.80	3.10	3.10	4.46		6.23	12.46	12.71	1.92	3.45	3.45	4.90		6.86	13.72	13.99
	20	35	35	70		1.80	3.10	3.10	5.60		6.80	13.60	13.87	1.80	3.20	3.20	6.00		7.10	14.20	14.48
	20	35	50	50		1.90	3.11	4.24	4.24		6.74	13.48	13.75	1.90	3.30	4.50	4.50		7.10	14.20	14.48
	26	26	26	26		2.58	2.57	2.57	2.58		5.15	10.30	10.50	2.52	2.52	2.52	2.53		5.04	10.09	10.29
	26	26	26	35		2.52	2.52	2.52	3.40		5.48	10.96	11.18	2.52	2.52	2.52	3.40		5.48	10.96	11.18
	26	26	26	50		2.40	2.40	2.40	4.06		5.63	11.26	11.49	2.60	2.60	2.60	3.72		5.76	11.52	11.75
	26	26	26	70		2.35	2.35	2.35	6.12		6.59	13.17	13.44	2.50	2.50	2.50	6.70		7.10	14.20	14.48
26	26	35	35		2.30	2.30	3.07	3.07		5.37	10.74	10.95	2.52	2.52	3.40	3.39		5.92	11.83	12.07	
26	26	35	50		2.30	2.30	3.20	4.39		6.10	12.19	12.44	2.52	2.52	3.45	4.94		6.71	13.43	13.69	
26	26	35	70		2.10	2.10	3.10	6.04		6.67	13.34	13.61	2.50	2.50	3.20	6.00		7.10	14.20	14.48	
26	26	50	50		2.30	2.30	4.31	4.31		6.61	13.22	13.49	2.50	2.50	4.60	4.60		7.10	14.20	14.48	
26	26	50	70		2.20	2.20	4.10	5.26		6.88	13.76	14.04	2.30	2.30	4.10	5.50		7.25	14.50	14.79	
26	35	35	35		2.36	3.10	3.10	3.10		5.83	11.66	11.89	2.49	3.45	3.45	3.45		6.42	12.84	13.09	

Table 4: Continued...

Rinnai Outdoor Model: MON5H13

Rinnai Indoor Hi-Wall: HINRA20M, HINRA26M, HINRA35M, HINRA50M, HINRA70M

Rinnai Indoor Ducted: DINSD261M, DINSD351M, DINSD501M, DINSD701M

Indoor Unit Combinations						Cooling								Heating							
Operation	Unit ID					Capacity of each Indoor Unit (kW)					System Capacity (kW)			Capacity of each Indoor Unit (kW)					System Capacity (kW)		
	Unit A	Unit B	Unit C	Unit D	Unit E	Room A	Room B	Room C	Room D	Room E	Min	Rated	Max	Room A	Room B	Room C	Room D	Room E	Min	Rated	Max
4 Units	26	35	35	50		2.30	3.20	3.20	4.29		6.50	12.99	13.25	2.50	3.40	3.40	4.90		7.10	14.20	14.48
	26	35	35	70		2.30	2.90	2.90	5.60		6.85	13.70	13.97	2.30	3.20	3.20	5.80		7.25	14.50	14.79
	26	35	50	50		2.20	2.90	4.21	4.21		6.76	13.52	13.79	2.40	3.30	4.40	4.40		7.25	14.50	14.79
	35	35	35	35		3.08	3.08	3.08	3.08		6.16	12.32	12.57	3.43	3.43	3.43	3.43		6.86	13.72	13.99
	35	35	35	50		3.10	3.10	3.10	4.18		6.74	13.48	13.75	3.30	3.30	3.30	4.30		7.10	14.20	14.48
	35	35	35	70		2.90	2.90	2.90	5.10		6.90	13.80	14.08	3.00	3.00	3.00	5.50		7.25	14.50	14.79
	35	35	50	50		2.90	2.90	4.00	4.00		6.90	13.80	14.08	2.80	2.80	3.90	5.00		7.25	14.50	14.79
	35	35	50	70		2.80	2.80	3.90	4.50		7.00	14.00	14.28	2.70	2.70	3.90	5.20		7.25	14.50	14.79
5 Units	20	20	20	20	20	2.08	2.08	2.08	2.08	2.08	5.25	10.40	11.02	2.20	2.20	2.20	2.20	2.20	5.50	11.00	11.55
	20	20	20	20	26	2.03	2.03	2.03	2.03	2.68	5.56	10.80	11.59	2.10	2.10	2.10	2.10	2.73	5.56	11.13	11.69
	20	20	20	20	35	1.95	1.95	1.95	1.95	3.47	5.64	11.27	11.83	2.10	2.10	2.10	2.10	3.33	5.86	11.73	12.32
	20	20	20	20	50	1.98	1.98	1.98	1.98	4.95	6.44	12.87	13.51	1.95	1.95	1.95	1.95	4.94	6.37	12.74	13.38
	20	20	20	20	70	1.90	1.90	1.90	1.90	6.40	7.00	14.00	15.12	1.95	1.95	1.95	1.95	6.70	7.25	14.50	15.22
	20	20	20	26	26	1.90	1.90	1.90	2.58	2.58	5.43	10.86	11.41	1.90	1.90	1.90	2.58	2.58	5.43	10.86	11.41
	20	20	20	26	35	1.97	1.97	1.97	2.55	3.52	5.99	11.98	12.58	1.95	1.95	1.95	2.55	3.46	5.93	11.86	12.45
	20	20	20	26	50	1.95	1.95	1.95	2.55	4.93	6.66	13.33	13.99	1.95	1.95	1.95	2.55	4.93	6.66	13.33	13.99
	20	20	20	26	70	1.90	1.90	1.90	2.40	5.90	7.00	14.00	15.12	1.90	1.90	1.90	2.50	6.30	7.25	14.50	15.22
	20	20	20	35	35	1.96	1.96	1.96	3.43	3.43	6.37	12.74	13.38	1.94	1.94	1.94	3.46	3.46	6.37	12.74	13.38
	20	20	20	35	50	1.80	1.80	1.80	2.90	5.70	7.00	14.00	15.12	1.95	1.95	1.95	3.30	4.85	7.00	14.00	14.70
	20	20	20	35	70	1.80	1.80	1.80	3.10	5.50	7.00	14.00	15.12	1.90	1.90	1.90	3.10	6.00	7.40	14.80	15.54
	20	20	20	50	50	1.80	1.80	1.80	4.30	4.30	7.00	14.00	15.12	1.90	1.90	1.90	4.55	4.55	7.40	14.80	15.54
	20	20	26	26	26	1.95	1.95	2.55	2.55	2.56	5.78	11.56	12.14	1.94	1.94	2.56	2.56	2.56	5.78	11.56	12.14
	20	20	26	26	35	1.95	1.95	2.55	2.55	3.45	6.22	12.45	13.07	1.95	1.95	2.56	2.56	3.43	6.22	12.45	13.07
	20	20	26	26	50	2.00	2.00	2.55	2.55	4.90	7.00	14.00	15.12	1.95	1.95	2.55	2.55	5.00	7.00	14.00	14.70
	20	20	26	26	70	1.80	1.80	2.40	2.40	5.60	7.00	14.00	15.12	1.80	1.80	2.40	2.40	5.60	7.00	14.00	14.70
	20	20	26	35	35	1.95	1.95	2.55	3.44	3.44	6.66	13.33	13.99	1.95	1.95	2.53	3.45	3.45	6.66	13.33	13.99
	20	20	26	35	50	1.80	1.80	2.50	3.40	4.50	7.00	14.00	15.12	1.90	1.90	2.40	3.20	4.60	7.00	14.00	14.70
	20	20	26	35	70	1.80	1.80	2.30	3.10	5.00	7.00	14.00	15.12	1.80	1.80	2.50	3.20	5.50	7.40	14.80	15.54
	20	20	35	35	35	1.90	1.90	3.40	3.40	3.40	7.00	14.00	14.70	1.96	1.96	3.43	3.43	3.43	7.10	14.21	14.92
	20	20	35	35	50	1.80	1.80	3.10	3.10	4.20	7.00	14.00	15.12	1.80	1.80	3.10	3.10	4.20	7.00	14.00	14.70
	20	20	35	35	70	1.80	1.80	2.80	2.80	4.80	7.00	14.00	15.12	1.80	1.80	2.90	2.90	5.40	7.40	14.80	15.54
	20	20	35	50	50	1.80	1.80	2.80	3.80	3.80	7.00	14.00	15.12	1.80	1.80	3.10	4.05	4.05	7.40	14.80	15.54
	20	26	26	26	26	2.00	2.60	2.60	2.60	2.60	6.20	12.40	13.02	2.00	2.54	2.54	2.54	2.53	6.08	12.15	12.76
	20	26	26	26	35	2.00	2.60	2.60	2.60	3.40	6.60	13.20	13.86	1.95	2.55	2.55	2.55	3.34	6.47	12.94	13.58
	20	26	26	26	50	1.90	2.50	2.50	2.50	4.60	7.00	14.00	15.12	1.90	2.50	2.50	2.50	4.60	7.00	14.00	14.70
	20	26	26	26	70	1.80	2.30	2.30	2.30	5.30	7.00	14.00	15.12	1.80	2.40	2.40	2.40	5.80	7.40	14.80	15.54
20	26	26	35	35	1.95	2.51	2.51	3.40	3.40	6.89	13.77	14.46	1.96	2.55	2.55	3.43	3.43	6.96	13.92	14.61	
20	26	26	35	50	1.80	2.50	2.50	3.10	4.10	7.00	14.00	15.12	1.90	2.50	2.50	2.80	4.30	7.00	14.00	14.70	
20	26	26	35	70	1.80	2.20	2.20	2.80	5.00	7.00	14.00	15.12	1.80	2.40	2.40	3.00	5.20	7.40	14.80	15.54	
20	26	26	50	50	1.80	2.20	2.20	3.90	3.90	7.00	14.00	15.12	1.80	2.40	2.40	4.10	4.10	7.40	14.80	15.54	
20	26	35	35	35	1.90	2.35	3.25	3.25	3.25	7.00	14.00	14.70	1.95	2.55	3.28	3.28	3.28	7.17	14.34	15.06	

Table 4: Continued...

Rinnai Outdoor Model: MON5H13

Rinnai Indoor Hi-Wall: HINRA20M, HINRA26M, HINRA35M, HINRA50M, HINRA70M

Rinnai Indoor Ducted: DINSD261M, DINSD351M, DINSD501M, DINSD701M

Indoor Unit Combinations						Cooling							Heating								
Operation	Unit ID					Capacity of each Indoor Unit (kW)					System Capacity (kW)			Capacity of each Indoor Unit (kW)					System Capacity (kW)		
	Unit A	Unit B	Unit C	Unit D	Unit E	Room A	Room B	Room C	Room D	Room E	Min	Rated	Max	Room A	Room B	Room C	Room D	Room E	Min	Rated	Max
5 Units	20	26	35	35	50	1.80	2.20	2.80	2.80	4.40	7.00	14.00	15.12	1.80	2.40	3.20	3.20	4.20	7.40	14.80	15.54
	20	26	35	35	70	1.70	2.10	2.70	2.70	4.80	7.00	14.00	15.12	1.80	2.20	2.90	2.90	5.00	7.40	14.80	15.54
	20	35	35	35	35	1.80	3.05	3.05	3.05	3.05	7.00	14.00	15.12	1.80	3.05	3.05	3.05	3.05	7.00	14.00	14.70
	20	35	35	35	50	1.80	2.80	2.80	2.80	3.80	7.00	14.00	15.12	1.80	3.00	3.00	3.00	4.00	7.40	14.80	15.54
	26	26	26	26	26	2.60	2.60	2.60	2.60	2.60	6.50	13.00	13.65	2.60	2.60	2.60	2.60	2.60	6.50	13.00	13.65
	26	26	26	26	35	2.60	2.60	2.60	2.60	3.50	6.80	13.60	14.28	2.55	2.55	2.55	2.55	3.26	6.73	13.46	14.14
	26	26	26	26	50	2.45	2.45	2.45	2.45	4.20	7.00	14.00	15.12	2.40	2.40	2.40	2.40	4.40	7.00	14.00	14.70
	26	26	26	26	70	2.20	2.20	2.20	2.20	5.20	7.00	14.00	15.12	2.30	2.30	2.30	2.30	5.60	7.40	14.80	15.54
	26	26	26	35	35	2.51	2.51	2.51	3.12	3.12	6.89	13.77	14.46	2.54	2.54	2.54	3.22	3.22	7.03	14.06	14.76
	26	26	35	35	35	2.35	2.35	3.10	3.10	3.10	7.00	14.00	15.12	2.35	2.35	3.10	3.10	3.10	7.00	14.00	14.70
	26	26	35	35	50	2.20	2.20	2.80	2.80	4.00	7.00	14.00	15.12	2.30	2.30	3.10	3.10	4.00	7.40	14.80	15.54
	26	35	35	35	35	1.80	3.05	3.05	3.05	3.05	7.00	14.00	15.12	2.40	3.10	3.10	3.10	3.10	7.40	14.80	15.54
	26	35	35	35	50	2.10	2.70	2.70	2.70	3.80	7.00	14.00	15.12	2.20	2.85	2.85	2.85	4.05	7.40	14.80	15.54
	35	35	35	35	35	2.80	2.80	2.80	2.80	2.80	7.00	14.00	15.12	2.96	2.96	2.96	2.96	2.96	7.40	14.80	15.54
	35	35	35	35	50	2.60	2.60	2.60	2.60	3.60	7.00	14.00	15.12	2.70	2.70	2.70	2.70	4.00	7.40	14.80	15.54

Capacities tested in accordance with AS/NZS 3823.3, with 5m interconnecting length for all attached Indoor Units. With our policy of continuous improvement, we reserve the right to change, or discontinue at any time, specifications or designs without notice.

Rinnai Australia Pty Ltd

ABN 74 005 138 769

100 Atlantic Drive,
Keysborough, Victoria 3173

For further information visit

www.rinnai.com.au

or call 1300 555 545

Rinnai

TOTAL HOME COMFORT



HOT WATER



HEATING



COOLING

RA199.08.18