

Code EBB900SS – 90cm Stainless Steel Alfresco Canopy



3 SPEED MOTOR

This range hood provides the option of 3 different speed levels ensuring you have the option to use your range hood at a low, medium or high level of operation.

HIGH EXTRACTION CAPACITY

The extraction capacity of 1000m³/hr provides strength and power to this stylish range hood.

COMMERCIAL STYLE BAFFLE FILTERS

Easy clean, stainless steel baffle filters, are designed to capture all steam & moisture, whilst removing exhaust & odors.

DECIBEL RATING

53-66 dba

ELECTRICAL REQUIREMENT

Range hood is supplied with 10amp cord & plug.

OPTIONAL ACCESSORIES

RANGEHOOD EXTENSIONS

Flue Extension 1m Code: EBBEXT

RANGEHOOD VENTILATION KITS

RHKE65 – Wall – Eave vent kit

RHKMR65 – Universal metal roof kit, includes flashing

RHKTR65 – Universal tile roof kit, includes flashing

RECIRCULATING INFORMATION

This rangehood cannot be recirculated.

BAFFLE FILTER CLEANING INFORMATION:

Baffle filter: requires cleaning monthly, this will ensure no interruptions with airflow operation.

INSTALLATION INFORMATION:

Warning: This Canopy is not an outdoor appliance, but it can be installed in an alfresco area in accordance with the following:

- Installation must be performed by a qualified competent installer.
- The canopy cannot be exposed to rain, moisture or dust.
- Do not install in a location where winds may blow water or dust onto the canopy.
- If installed above a barbecue, the minimum distance from the cooking surface is **1200mm**
- If installed above a cooking appliance, the minimum distance from the cooking surface is **650mm**.

FEATURES

- 304 grade stainless steel finish
- 3 speed aluminum alloy motor
- 1000m³ / hr extraction capacity
- 2 x 0.5W LED lights
- Separate light function
- Electronic button front controls
- 3 piece baffle filters
- 150mm air flow outlet

TIPS FOR BETTER USE

- Leave your range hood on for 15 minutes after the cooking of the food to remove all odors, steam etc.
 - The Baffle filters need to be cleaned after approximately 2 months of standard operation
 - It is also recommended that fumes from the range hood be ducted out into the atmosphere.
 - Turn off the range hood before attempting to clean
- Installation recommended by qualified installer.**



Electronic button front control




0.5W LED lights



Baffle filters

PRODUCT DIMENSIONS

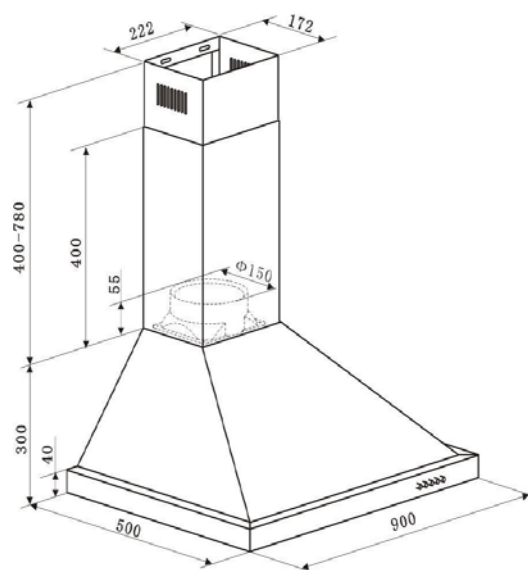

bringing european quality to your home